

PSAI

Inductive Arc Position Sensor



Available with



Play
resistant



Touchless
sensor

True touchless operation

Without any internal or external gears or linkages the sensor is easily assembled and calibrated and free from wear and tear over lifetime.



Stray-field
immune

Immune to magnetic stray fields

No shielding required as inductive technology is not affected by electromagnetic stray fields. Magnetic target not required to operate.



Virtually
unlimited life

Unlimited mechanical life

The separation of electronics and metallic target allows for a virtually unlimited lifetime independent of number of revolutions.



Compact
size

Compact and low profile package

The sensor target can be integrated into the existing application, and the sensor itself come in an exceptionally compact and low profile package.



Made for harsh environments

The rugged package protects the sensor from dust, moisture, vibration and extreme temperatures for usage in the most demanding environments.



Fully
customizable

Adaptable to your requirements

Custom mechanical design, programmable transfer function and switch outputs as well as different output protocols and redundancy levels available.

Piher Sensing Systems' Inductive Arc Position Sensors are designed for heavy-duty applications such as tractors, excavators, and loaders.

Inductive sensors operate without magnets and detect the position of a solid metallic target, which can be easily integrated into existing machine structures. In addition to the sensors' excellent accuracy, IP67 and IP69K sealing and high temperature tolerance make these absolute position sensors an excellent choice for harsh environments typically found in transportation, industrial and off-highway applications.

The arc-shaped design allows for quick assembly and calibration during production, leading to additional cost savings during the production process.

POTENTIAL APPLICATIONS



Excavator Boom Arm Position



Articulated Vehicle Steering Position



Skid Steer Arm / Bucket Position

Inductive Arc Position Sensor

MECHANICAL SPECIFICATIONS			
Life		Virtually unlimited	
Air gap		2 mm ±1 mm	
ELECTRICAL SPECIFICATIONS			
Linearity ¹		±1 % absolute (±0.5 % on request)	
Angular range ¹		150 degrees 100 degrees 45 degrees	
Output protocol ²		Analog (Ratiometric) PWM SENT CAN Open / CAN SAE J1939	
Output function ¹	Standard Inverted Redundant	10% to 90% Vdc (CW) 90% to 10% Vdc (CCW) 10% to 90% Vdc (CW and CCW)	
Start-up time		<10ms	
Resolution	Analog, CAN,PWM SENT	Up to 10 bit Up to 12 bit	
Max. output rate (updates per second)	Analog ramp PWM SENT CAN	10,000 2,000 1,235 10	
Supply voltage		5 V ±10%	7 V to 32 V
Typical current consumption	Simple Redundant CAN	12 mA 24 mA 68 mA	14 mA 28 mA 72 mA
Voltage protection		±10 V	±36 V
Self-diagnostic features		Yes	

¹ Other specifications on request.

² CAN protocol available for simple output versions only.

ENVIRONMENTAL SPECIFICATIONS		
Operating and storage temperature ¹	Analog, PWM, SENT CAN	-40° to +125°C -40° to +85°C
Shock		50g
Vibration		5-2,000 Hz; 20g; A _{max} 0.75 mm
Sealing		IP67, IP69K

HOW TO ORDER (Example: PSAI-A-150S-05)

PSAI	-	-	-	-	-	-
Series	Output protocol ¹	Electric rotational angle ²	Output function	Voltage supply ³		
	A = analog P = PWM S = SENT J = CAN SAE J1939 O = CAN OPEN	150 100 045	S = standard / CW I = inverted / CCW R = redundant	05 = 5V ±10% RE = 7V-32V		

¹ The analog output is ratiometric, proportional:

- for supply voltage "5V" to input voltage;
- for supply voltage "RE" to 5V.



Default frequency for PWM versions is 200 Hz. Others on request.

² Other electrical rotational angles on request.

³ CAN models are available in 7V-32V. For other voltages: check availability.



DIMENSIONS (MM)

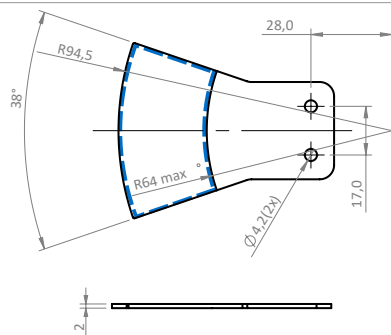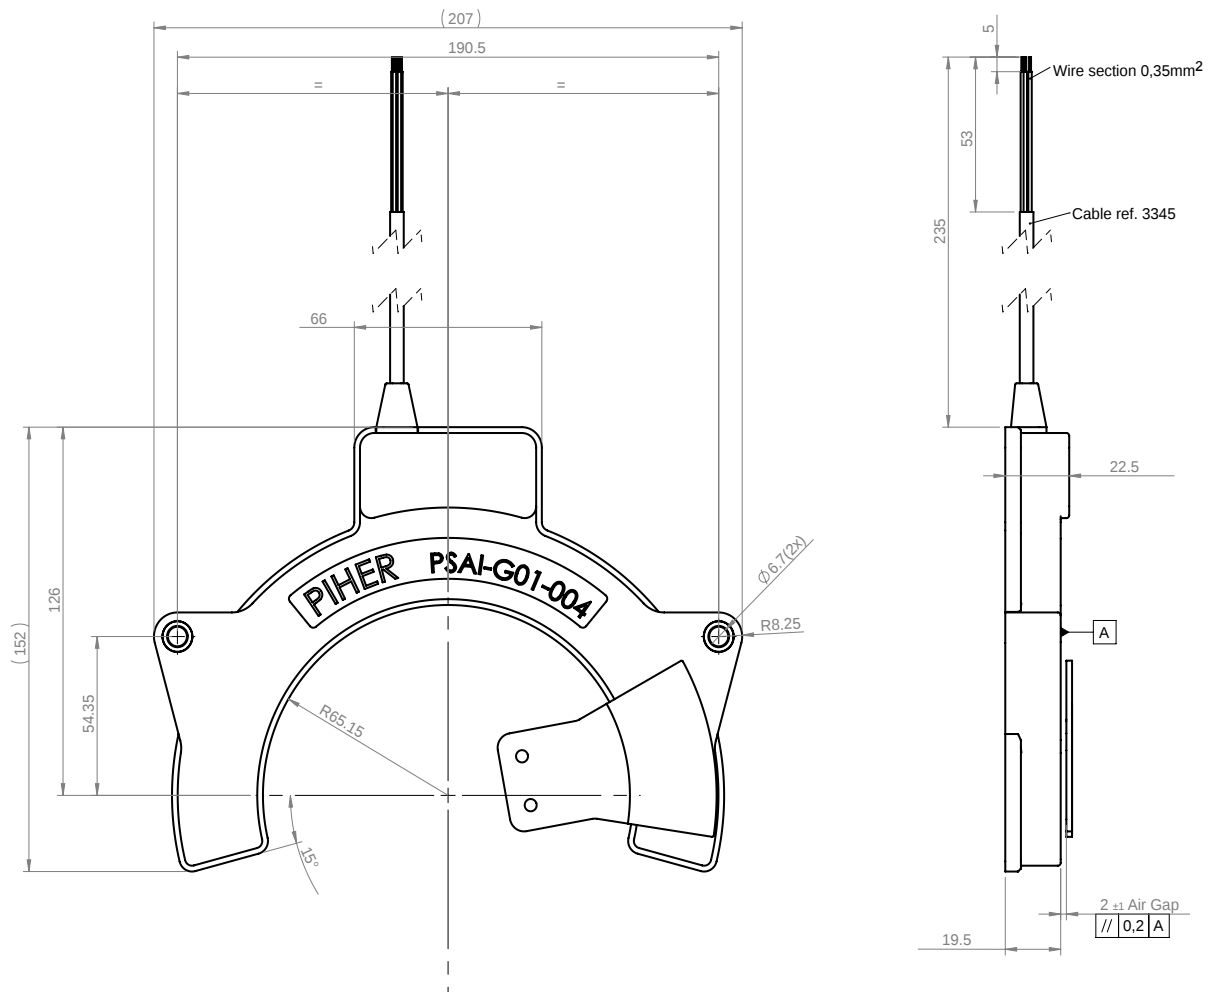


Recommended target designs

Recommended target material: Aluminium


For custom target designs, make sure the blue marked area is rotating above the sensor as indicated in the provided drawing.




Request the 3D model at:
www.piher.net




45°

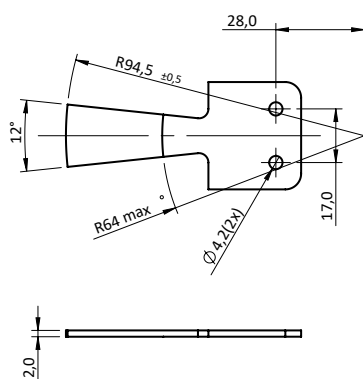

100°

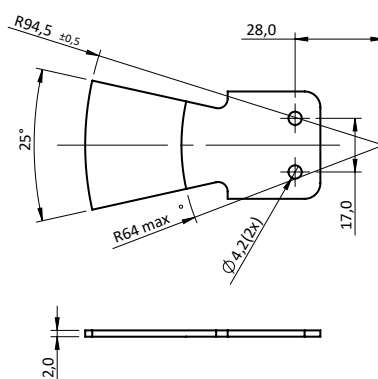

150°

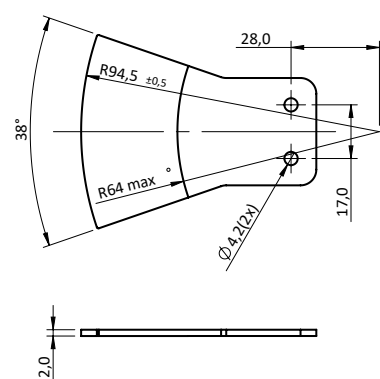


CONNECTION SCHEME


Color	Simple output		Redundant output		CAN
	5V	7V to 32V	5V	7V to 32V	
Brown	Power supply	Power supply	Power supply	Power supply	Power supply
Blue	Ground	Ground	Ground	Ground	Ground
Black	Signal output	Signal output	Signal output 1	Signal output 1	CAN High
White	Not used	Not used	Signal output 2	Signal output 2	CAN Low
Grey	Not used	Not used	Not used	Not used	Not used
Yellow	-	-	-	-	Not used
Green	-	-	-	-	Not used

Connector assemblies available upon request.

OUTPUT CURVE

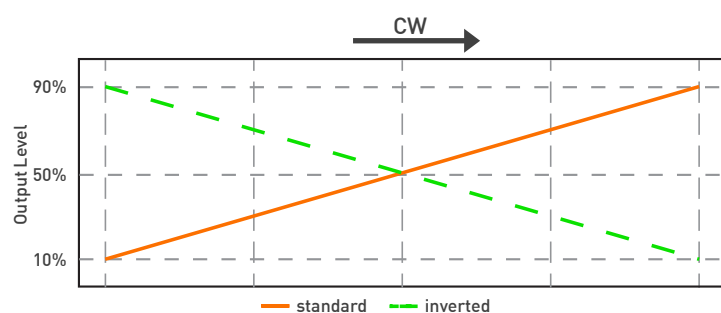

ERA	Initial	Mechanical Rotational Angle	Final
150° →	105°	180°	255°
100° →	130°	180°	230°
45° →	157.5°	180°	202.5°

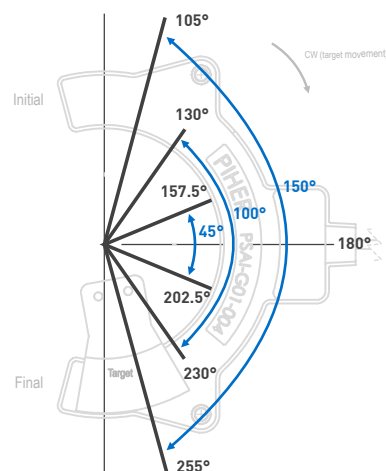

ERA: Electrical Rotational Angle. Custom output functions available on request.



All our products are customizable to meet your specific requirements.
Please always use the latest updated datasheets and 3D models published on our website.

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.
Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.
Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.
No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.
The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.
Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems
Polígono Industrial Municipal
Vial T2, Nº22
31500 Tudela
Spain

sales@piher.net

+34 948 820 450



NEED QUICK HELP?

Our AI Virtual Assistant is available
24/7 to provide instant support—
visit chat.piher.info to chat now!

Rev. 280126 © Piher Sensors & Controls S.A.