

PSC-360

Hall-Effect End-of-Shaft Rotary Position Sensor



Available with




KEY FEATURES



True, contactless operation

Without any gears or mechanical interfaces the sensor is easily assembled and calibrated and subject to limited wear and tear over lifetime.



360 degree absolute position feedback

Endless mechanical rotational angle without dead band, keeps the position on power loss with programmable electrical angles from 15 to 360 degrees.




Made for harsh environments

The rugged package protects the sensor from dust, moisture, vibration and extreme temperatures for usage in the most demanding environments.



Durable and robust design

The non-contacting design allows for an extra-long product lifetime of up to 50 million cycles.



Integrated shaft

The magnet is securely fastened to the shaft and acts as only moving component in the sensor.



Adaptable to your requirements

Programmable transfer function and switch outputs as well as different output protocols and redundancy levels available.

DESCRIPTION

The robust PSC-360 is a cost-effective non-contacting rotary position sensor that provides high performance in harsh environments such as transportation, industrial and medical applications.

This compact sensor of Piher Sensing Systems is truly non-contacting with a permanent magnet that is securely fastened to the shaft and acts as the only moving component in the sensor. Redundant versions provide independent voltage outputs with fully customizable characteristics. Additionally a switch output can optionally be configured.

The endless rotation sensor is highly configurable with a programmable angular range between 15 and 360 degrees, different signal output options and support for low and high-voltage power supply. Sealed, flange mounted for easy positioning and with fly leads, it can be customized to fit any desired connector configuration.

Multi-turn configurations are available on request.

APPLICATIONS

Industrial

- ▶ Autonomous warehouse robotics
- ▶ Robotics and automation feedback
- ▶ Robot arm position
- ▶ Valve monitoring
- ▶ Conveyor operation

Transportation

- ▶ Steering wheel angle
- ▶ Pedal Position
- ▶ Suspension/height detection
- ▶ Fork height and mast tilt
- ▶ Bucket position
- ▶ Hitch position
- ▶ Transmission gear shift

Marine

- ▶ Steering and shifter sensor

Home and Building Automation

- ▶ HVAC systems

PSC-360

Hall-Effect End-of-Shaft Rotary Position Sensor

MECHANICAL SPECIFICATIONS

Rotational life	Up to 50.000.000 cycles
Mechanical range	360° (endless rotation)
Shaft diameter	6mm

ELECTRICAL SPECIFICATIONS

Linearity ¹	Analog, PWM CAN	±1% absolute (±0.5% on request) ±3 degrees absolute
Electrical angular range		Configurable from 15° to 360°
Output protocols		Analog (Ratiometric), PWM CAN SAE J1939 CAN OPEN
Output		Simple Redundant Full-redundant
Switch output		On request
Resolution		Up to 12 bit
Supply voltage ²	Analog, PWM Analog, PWM, CAN	5V ±10% 7V to 15V
Supply current	Single version Redundant version CAN version	Typ 8.5 mA Typ 17 mA Typ 47 mA
Voltage protection		±10V
Self-diagnostic features		yes

¹ Ferromagnetic materials close to the sensor (i.e. shaft, mounting surface) may affect the sensor's linearity.

² Voltages up to 25V possible on request.


ENVIRONMENTAL SPECIFICATIONS

Operating and storage temperature ¹	Analog, PWM CAN	-40° to +125°C -40° to +85°C
Shock		50g
Vibration		5-2000 Hz; 20g; Amax 0,75 mm

¹ Other specifications on request

Hall-Effect End-of-Shaft Rotary Position Sensor

PSC-360G2-F





Page 3 of 6
Amphenol Sensors

PSC-360

Hall-Effect End-of-Shaft Rotary Position Sensor

DIMENSIONS [MM]

PSC-360G2-H

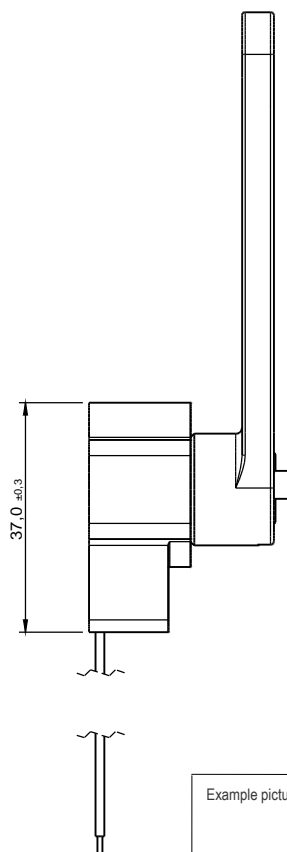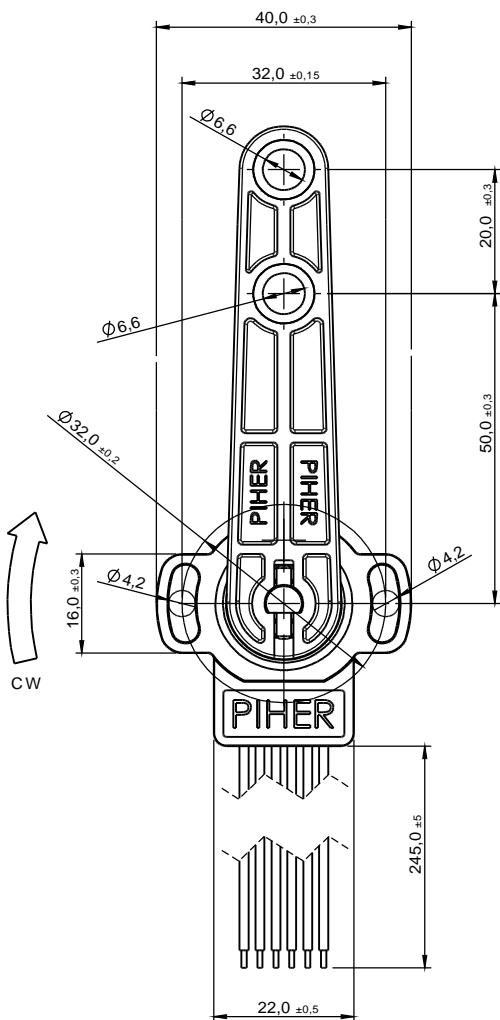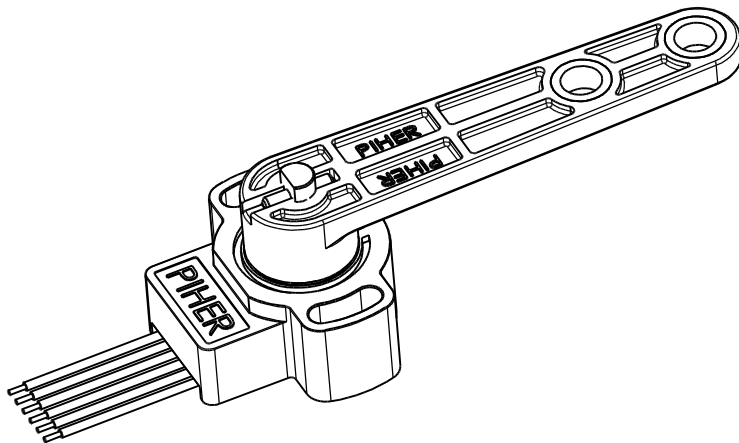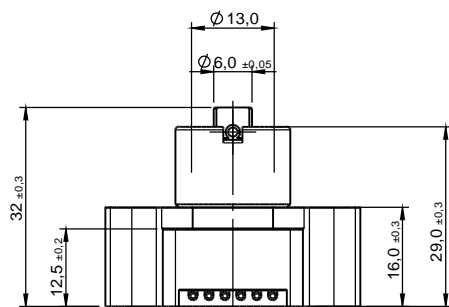

Example picture of the sensor with a lever and a mounting plate.



Download the STEP's file here:
www.piher.net

Sensor shown with the rotor at zero position.

PSC-360

Hall-Effect End-of-Shaft Rotary Position Sensor

HOW TO ORDER (Example: PSC360G2-F1A-C0001-ERA360-05K)

Simple Output - Analogic, PWM and CAN

PSC360G2	-	F	-	1	-	C	----	-	ERA	----	-	---	K	-	----
Series	Actuator	Mounting plate	Type	Output ¹	Output function ²	Electric rotational angle ³	Voltage supply ⁴	Temp. range ⁵	PWM Frequency Hz ⁶						
	F = flat shaft H = lever	[empty] = no M = yes	1 = simple	A = analogic P = PWM J = CAN SAE J1939 O = CAN OPEN	C0000 C0001	ERA040 ERA041 ... ERA360	05 = 5V ±10% RE = 7V-15V	Analogic, PWM = -40°C to +125°C CAN: -40°C to +85°C	[empty] = 200Hz F100 = 100Hz F101 = 101Hz ... F999 = 999Hz						

Redundant output - Analogic, PWM and CAN

PSC360G2	-	F	2	--	-	C ____	-	ERA ____	-	--		K	-	----	----
Series	Actuator	Type	Output ¹	Output function ²	Electric rotational angle ³	Voltage supply ⁴	Temp. range ⁵	PWM Frequency Hz. [1] ⁶	PWM Frequency Hz. [2] ⁶						
	F = flat H = lever	2 = redundant	AA= analogic PP = PWM JJ = CAN SAE J1939 OO = CAN OPEN	C0002	ERA040 ERA041 ... ERA360	05 = 5V ±10% RE = 7V-15V	Analogic, PWM = -40°C to +125°C CAN: -40°C to +85°C	F100 F101 ... F999	F100 F101 ... F999						

Full-redundant output - Analogic and PWM

PSC360G2	-	F	3	--	-	C----	-	ERA----	-	05	K	-	----	----
Series	Actuator	Type	Output ¹	Output function ²	Electric rotational angle ³	Voltage supply ⁴	Temp. range	PWM Frequency Hz. [1] ⁶	PWM Frequency Hz. [2] ⁶					
	F = flat H = lever	3 = full-redundant	AA = analogic PP = PWM	C0002	ERA040 ERA041 ... ERA360	05 = 5V ±10% RE = 7V-15V	-40°C to +125°C	F100 F101 ... F999	F100 F101 ... F999					

1 The analog output is ratiometric, proportional:

- for supply voltage "5V" to input voltage;
- for supply voltage "RE" to 5V.

2 Other output functions available, please check availability. Enter CXXXX as long as the new output function is not defined.

3 Models with ERA < 40° available on request


4 CAN models are available in 7V-15V. For other voltages up to 25V, check availability. For 7V-15V PWM Full-redundant models please contact us before ordering.

5 CAN models: other temperatures to be studied on request

6 Leave empty if not applicable. Default frequency is 200 Hz

 [check inventory](#)

OUTPUT FUNCTIONS

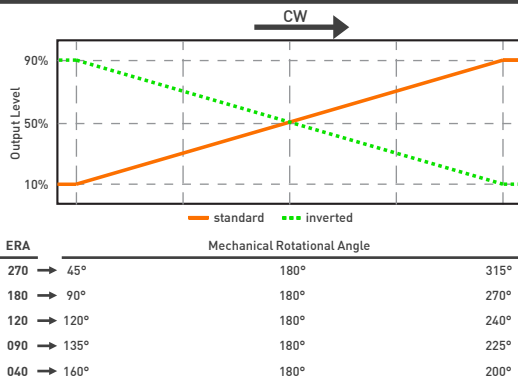

ERA	Standard	Inverted	Redundant & Full redundant
360°	C0000	C0001	C0002
270°	C0208	C0158	C0031
180°	C0007	C0072	C0036
120°	C0024	On request	C0032
90°	C0011		C0025
70°	C0150		C0149
60°	C0006		C0020
40°	C0026		C0123


Custom output functions on request

PSC-360

Hall-Effect End-of-Shaft Rotary Position Sensor

OUTPUT VOLTAGE DEPENDING ON MAGNET POSITION

PSC360G2-F1A-C0000-ERA360-05K

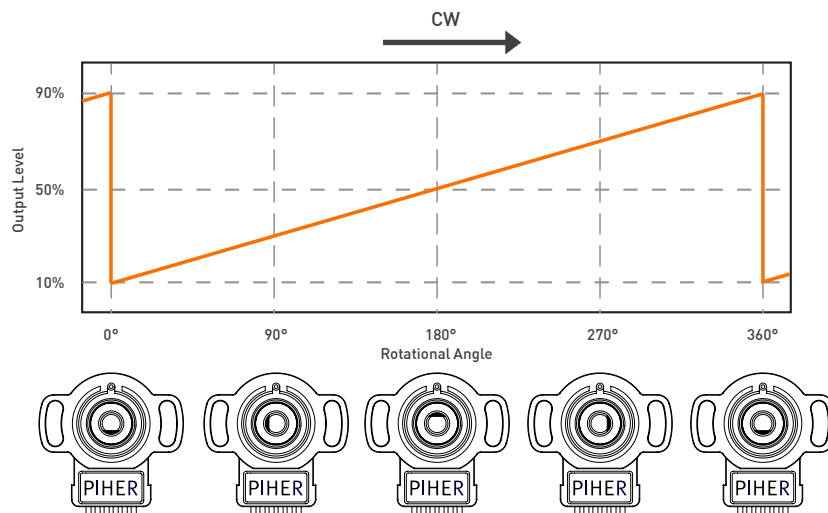

Custom output functions on request.

SIMILAR PIHER'S ANGULAR MAGNETIC POSITION SENSORS (END-OF-SHAFT)



PSC-360U series - Panel mount 360° Angular Sensor



HRPS series - standard design with integrated connector



To ensure you have the most up-to-date information, we recommend always downloading the latest version of this datasheet from www.piher.net

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information. Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein. Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems
Polígono Industrial Municipal
Vial T2, N°22
31500 Tudela
Spain

sales@piher.net

+34 948 820 450



NEED QUICK HELP?

Our AI Virtual Assistant is available 24/7 to provide instant support—visit chat.piher.info to chat now!

Rev. 26/02/25 © Piher Sensors & Controls S.A.