


# Printed PCB Resistors

## Printed Polymer Resistors for PCBs

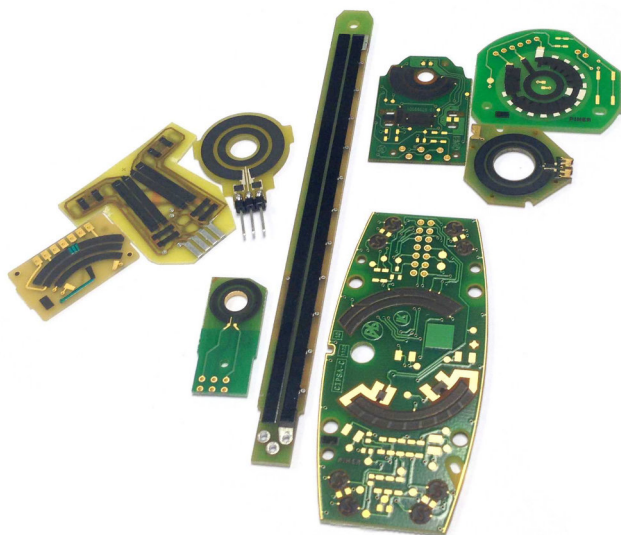

Rotary and linear printed potentiometers. Depending on the design, the resistance can be configured with either linear or logarithmic characteristics.

### POTENTIAL APPLICATIONS

#### AUTOMOTIVE:

- Climate control:
  - Temperature
  - Air flow
  - Distribution
- Headlight positioning control.
- Steering column module switches.
- Mirror position sensor.
- Headlight position sensor.
- Fuel tank level sensor.
- Pedal sensors.
- Instrument panel controls.
- Dimmers for lighting.
- Seat position sensor.

#### HOME and BUILDING AUTOMATION:

- Light dimmers.
- Speed control for hand power tools.

#### INDUSTRIAL & MARINE:

- Heavy-duty equipment.
- Material handling equipment (e.g. forklifts)
- Marine grade sensors.
- AG and farm equipment.

#### MEDICAL

PIHER's Printed Resistors use advanced thick-film polymer technology to integrate custom resistive elements — such as fixed resistors, potentiometer tracks, switches and conductors — onto a wide range of substrates, including FR4, flexible materials, and high-temperature ceramics. Screen-printable polymer pastes enable cost-effective, tailor-made designs for virtually any PCB shape or size, offering high layout flexibility even in low to medium volumes.

### FEATURES

- **Flexible Substrate Options:** Compatible with rigid, semi-flex, or fully flexible circuit boards.
- **High Design Versatility:** Enables compact, low-profile designs ideal for space-constrained applications.
- **Cost-Effective Customization:** Efficient production with reduced material and assembly costs.
- **Precision Tuning:** Laser trimming provides tight tolerances and high-volume consistency.
- **In-Process Calibration:** Enables tight resistance matching and stable voltage-divider performance.
- **Durable & Reliable:** Excellent thermal and electrical stability, even under harsh conditions.
- **Integrated Functions:** Combine multiple passive components in a single print layer to reduce BOM complexity.
- **Custom Contact Solutions:** Standard or tailor-made wiper/contact assemblies to match customer specifications.

Ideal for applications requiring miniaturization, precision, and reliability, PIHER's Printed Resistors using polymer thick-film technology deliver scalable performance for modern electronic designs.

### MAIN SPECIFICATIONS

- Resistance range: 10Ω to 1MΩ
- TCR: Better than 300 ppm/°C.
- Temperature range: 40°C to +125°C
- Tolerances\*:
  - Ohmic value:
    - Non-trimmed resistors: ± 30%, ±20%  
— (depending on values, shapes and substrates)
    - Trimmed resistors: ±5%
    - Matching capability: ±2%, ±1%
  - Voltage Ratio:
    - Non-trimmed resistors: ±10%
    - Trimmed resistors: ±2%
- Rotational Life (potential dividers only):
  - From 10 thousand to 5 million cycles  
(depending on each individual case)


\* Others upon request

### ADVANTAGES


- Low profile and lightweight
- Cost-effective
- No insertion costs or errors
- No soldering issues
- Unlimited combinations of fixed and variable resistors
- Excellent high-frequency performance
- Calibrated voltage dividers available
- Custom ohmic values available
- Functional (in-circuit) trimming
- Laser trimming capabilities
- Shipping from Europe, America, and China

**WIPER EXAMPLES** (technical specifications upon request)


**Ref. 5303**

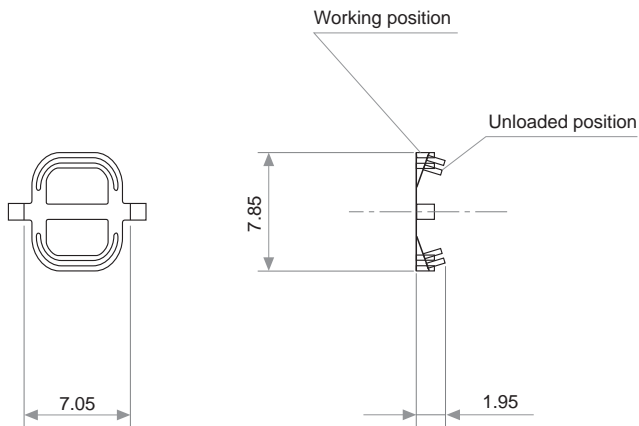


**Ref. 5382**

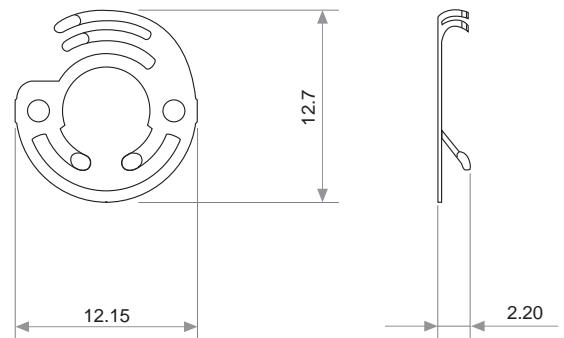


**Ref. 5076**

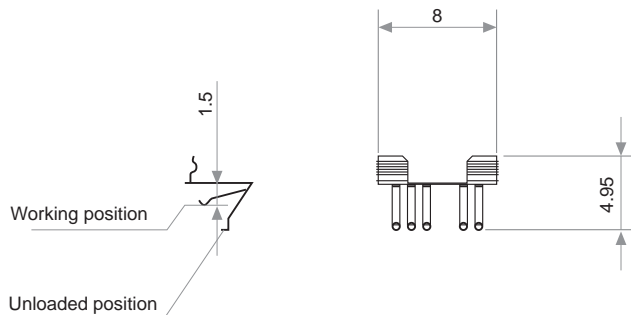


**Ref. 5738**

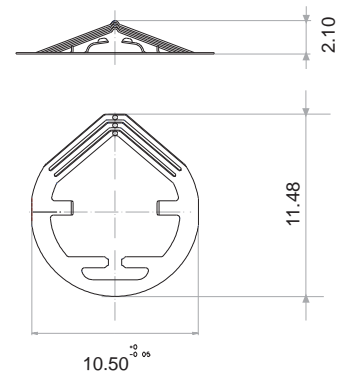

**Ref. 5184**

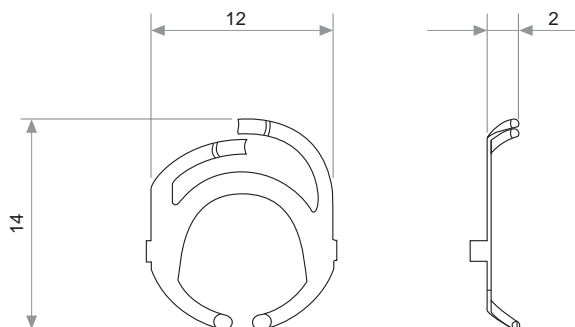

**Example images**

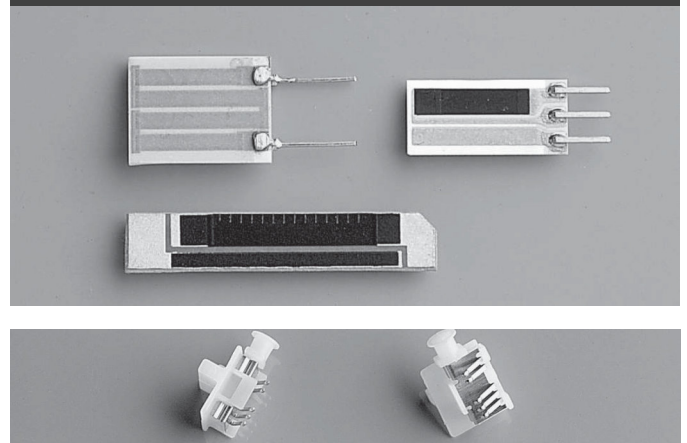

## One Stop Shop Multiple Advantages



Engineering  
design-in  
support



Output  
customization



Cable harness and  
connector assembly



One-stop solution provider for  
different sensing  
technologies

Hall-effect

TMR

Resistive

Inductive

Printed electronics



Global  
footprint



Manufacturing  
capabilities for high  
and low volume  
programs



Diverse portfolio of standard and customized  
sensors: Tilt, Position, Speed and Current.



To ensure you have the most up-to-date information, we recommend always  
downloading the latest version of this datasheet from [www.piher.net](http://www.piher.net)

### Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.  
Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.  
Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. Drawings are not necessarily to scale. Some elements may be shown at different scales for clarity. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.  
The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.  
Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

### CONTACT

**Piher Sensing Systems**  
Polígono Industrial Municipal  
Vial T2, N°22  
31500 Tudela, Spain

[sales@piher.net](mailto:sales@piher.net)

+34 948 820 450



### NEED QUICK HELP?

Our AI Virtual Assistant is available  
24/7 to provide instant support—  
visit [chat.piher.info](http://chat.piher.info) now!

Rev: 08/04/2025 © Piher Sensors & Controls S.A.